



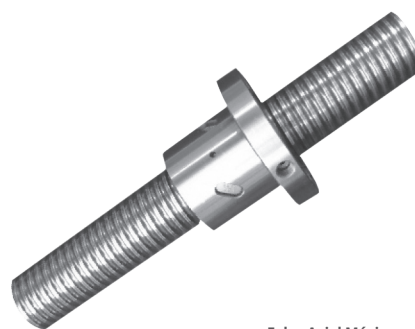


Fuso de Esfera Laminado

Castanha Simples Flangeada (C7 / C10)

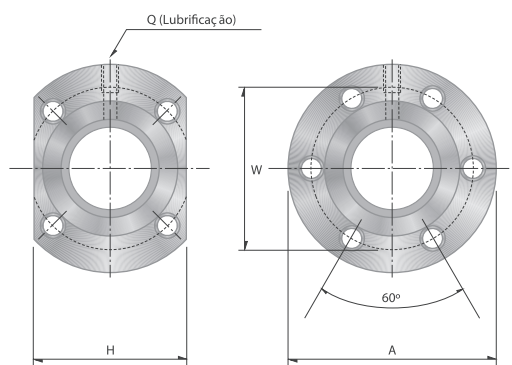

Folga Axial Máxima:
16 a 40: 0,08mm
50 a 80: 0,12mm

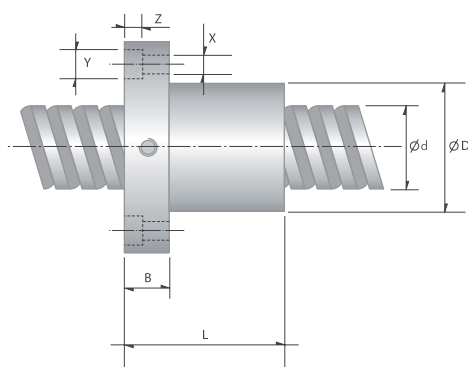

l: passo Da: diâmetro das esfera n: nº de círculos k: rigidez (kg/μm) Ca: capacidade de carga dinâmica (kgf) Coa: capacidade de carga estática (kgf)

Código	d	l	Da	D	A	B	L	W	H	X	Y	Z	Q	n	Ca	Coa	K
SFI 1605	16	5	3.175	30	79	10	50	39	34	4.5	8	4.5	M6	4	780	1790	20
SFI 1610	16	10	3.175	34	58	10	57	45	-	5.5	9.5	5.5	M6	3	833	1249	15
SFI 2005	20	5	3.175	34	57	11	51	45	40	5.5	9.5	5.5	M6	4	1130	2380	25
SFI 2505	25	5	3.175	40	63	11	51	51	46	5.5	9.5	5.5	M8	4	1280	3110	35
SFI 3205	32	5	3.175	46	72	12	52	58	-	6.5	11	6.5	M8	4	1450	4150	40
SFI 3210	32	10	6.35	54	88	15	90	70	-	9	14	8.5	M8	4	3390	7170	40
SFI 4005	40	5	3.175	56	90	15	55	72	-	9	14	8.5	M8	4	1610	5330	49
SFI 4010	40	10	6.35	62	104	18	93	82	-	11	17.5	11	M8	4	3910	9520	50
SFI 5010	50	10	6.35	72	114	18	93	92	-	11	17.5	11	M8	4	4450	12500	65
SFI 6310	63	10	6.35	85	131	22	98	107	95	14	20	13	M8	4	5070	16600	80
SFI 8010	80	10	6.35	105	150	22	98	127	115	14	20	13	M8	4	5620	21300	90