

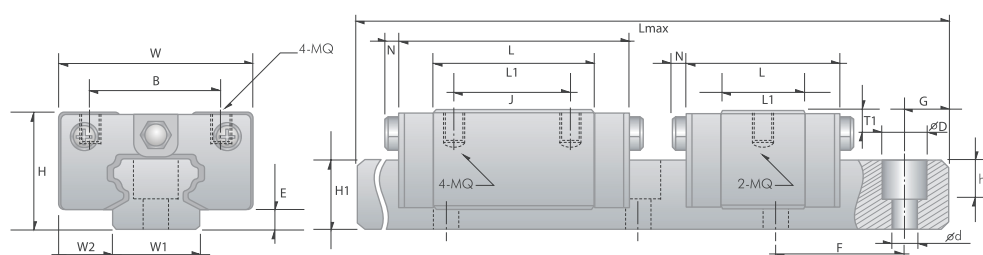


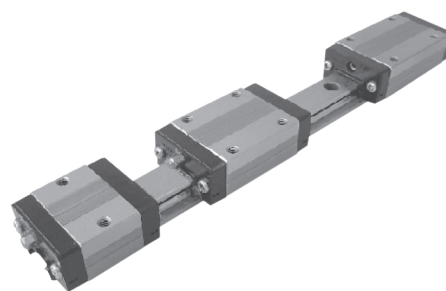

Guia de Esfera - Estreita 1

Precisão N - Pré-carga 0,02C



Modelo Completo do Patim BRS...B-N-Z1 ou BRS15BS-N-Z1

Código	Conjunto (mm)				Patim (mm)							Trilho (mm)			
	H	W	W2	E	L	BxJ	MQ	L1	Lubrific.	T1	N	W1	H1	F	d x D x h
BRS 15B	24	34	9.5	4.6	66	26 X 26	M4 x 5.6	40	Ø3	4.3	5	15	14	60	4.5 x 7.5 x 5.3
BRS 15BS	24	34	9.5	4.6	47.6	26 x -	M6 x 5.6	21.6	Ø3	4.3	5	15	14	60	4.5 x 7.5 x 5.3
BRS 25B	33	48	12.5	7	88	35 x 35	M6 x 8.4	57	M6 x 1	4.8	6.5	22	22	60	7 x 11 x 9
BRS 30B	42	60	16	9	109	40 x 40	M8 x 11.2	72	M6 x 1	7	6.5	28	26	80	9 x 14 x 12
BRS 35B	48	70	18	9.5	119	50 x 50	M8 x 11.2	80	M6 x 1	8	6.5	34	29	80	9 x 14 x 12

Modelo Trilho: BR...R-L...(mm) (...) TN e Comprimento Ex.: BR15R-L656 (28/10 x 60/28)

Código	Trilho (mm)	Capacidade de Carga (Kg)		Momento Estático (Kgfm)			Massa	
	G (Ideal)	Dinâmica (C)	Estática (C0)	Mx	My	Mz	Patim (Kg)	Trilho (Kg/m)
BRS 15B	28	850	1650	10	8	8	0.17	1.4
BRS 15BS	28	510	950	6	4.8	4.8	0.1	1.4
BRS 25B	28	2140	4000	36	32	31	0.38	3.6
BRS 30B	38	2980	5490	60	50	49	0.81	5.2
BRS 35B	38	3960	7010	96	75	73	1.2	7.2