
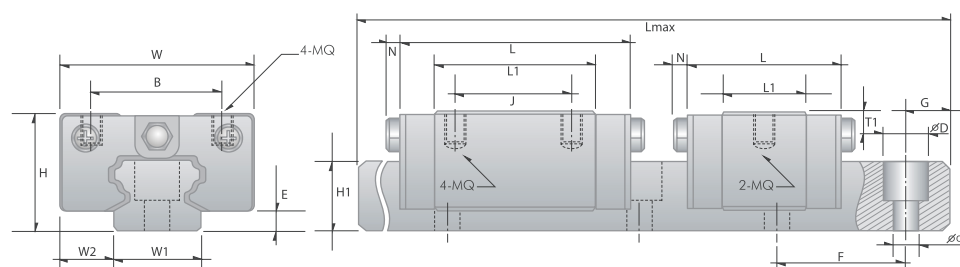
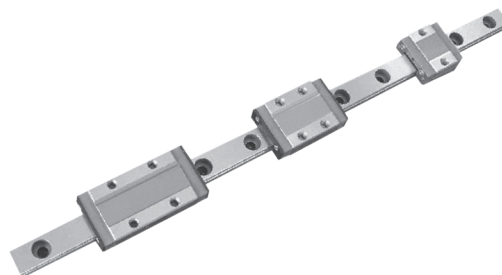


Guia de Esfera - Estreita 2

Precisão N - Pré-carga 0,02C



Código	Conjunto (mm)				Patim (mm)								Trilho (mm)			
	H	W	W2	E	L	BXJ	MQ	L1	Lubrific.	T1	N	W1	H1	F	d x D x h	
BRH 20B	30	44	12	5	77.8	32 X 36	M5 x 8	48.8	M6 x 1	7	6,5	20	18	60	6 x 9,5 x 8,5	
BRH 45BL	70	86	20.5	14	173	60 x 80	M10 x 16	129.8	M8 x 1	18	13	45	38	105	14 x 20 x 17	
BRH 25B	36	48	12.5	7	88	35 x 35	M6 x 9.6	57	M6 x 1	5	6,5	23	22	60	7 x 11 x 9	

Modelo Trilho: BR...R-L...(mm) (...) TN e Comprimento Ex.: BR45R-L2201 (50.5/20 x 105/50.5)

Código	Trilho (mm)	Capacidade de Carga (Kg)		Momento Estático (Kgfm)			Massa	
	G (Ideal)	Dinâmica (C)	Estática (C0)	Mx	My	Mz	Patim (Kg)	Trilho (Kg/m)
BRH 20B	28	1450	2560	22	18	18	0.31	2.6
BRH 45BL	50.5	8330	14950	267	210	210	2.8	12.3
BRH 25B	28	2140	4000	36	32	31	0.4	3.6